


PLAN VIEW
NOT TO SCALE

NOTES:

1. LOCATOR WIRE TO BE 14 GAUGE SOLID COPPER WIRE UF, THWN, OR THHN.
2. 6 FEET OF LOCATOR WIRE SHALL BE LEFT COILED WITHIN IN VALVE BOX.
3. 6 FEET OF LOCATOR WIRE SHALL BE LEFT COILED WITHIN THE METER BOX.
4. WIRE TO BE CONTINUOUS STRAND.
5. LOCATOR WIRE SHALL BE INSTALLED OVER PRIVATE WATER SERVICE LATERAL PIPELINES.
6. LOCATOR WIRE SHALL BE SECURED TO THE PRIVATE WATER SERVICE LATERAL PIPELINE WITH TAPE EVERY 10 FEET.
7. LOCATOR WIRE VALVE BOX TO BE INSTALLED WITHIN 6" OF THE BUILDING WHERE PRIVATE WATER SERVICE LATERAL ENTERS THE STRUCTURE.
8. VALVE BOX LID SHALL HAVE CAST IRON COVER LABELED "WATER".
9. PRIOR TO THE INSTALLATION OF THE METER, A LOCATIBILITY TEST IS TO BE PERFORMED ON ALL LOCATOR WIRES.
10. PRIVATE WATER SERVICE LATERAL PIPELINES TO BE INSTALLED 18" INCHES UNDER HARDSCAPE, EDGE OF CONCRETE AT A MINIMUM.

PRIVATE ALLEY SHALL BE DESIGNED TO PUBLIC STANDARDS (STREET WIDTH) WHEN SERVICES EXCEED 10 METERS PER ALLEY.

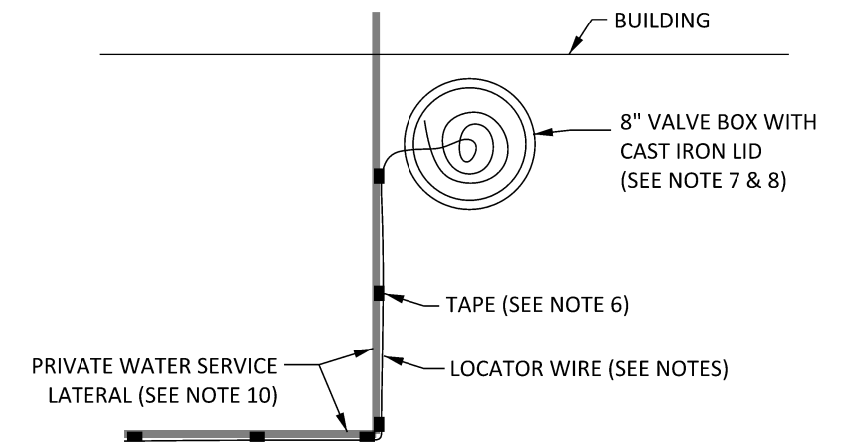

DETAIL "A"
NOT TO SCALE

REVISIONS						APPROVALS			EASTERN MUNICIPAL WATER DISTRICT STANDARD DRAWING	
NO.	DATE	INITIAL	DESCRIPTION	APP'D	DATE		INITIAL	DATE		
						DESIGN	AGA	10/27/23		
						CONSTRUCTION	DB	11/13/23		
						INSPECTION	BAM	11/2/23		
						OPERATIONS	JD	11/13/23		
						SUBMITTED	AGA	10/27/23		
REFERENCES:				SCALE: NONE					METER BANK INSTALLATION	
FILE I.D.: J:\Master CAD Files - Restricted\B-1077				DRAWN BY: CM						
									2 OF 2	B-1077A