


GENERAL NOTES

- 1. PAINTS: HYDRANTS TO BE PAINTED WITH APPROVED YELLOW.
- 2. USE THRUST BLOCKS PER B-407 FOR ACP. USE RESTRAINED JOINTS PER B-663 FOR PVC AND DUCTILE IRON. CONCRETE FOR THRUST BLOCKS AND SUPPORTS TO BE CLASS "C" (2000 PSI) CONCRETE.
 - 3. ALTERNATE MATERIALS MAY BE USED WHEN SPECIFIED.
 - 4. FIELD COATING FOR EXPOSED PIPE SHALL BE PER EMWD SPECIFICATIONS AND APPROVED MATERIALS.
 - 5. LENGTH OF BREAK-OFF RISER TO BE DETERMINED BY THE DIFFERENCE IN ELEVATION BETWEEN THE CENTER GRADE OF THE PIPELINE OUTLET AND THE TOP OF THE CURB OR PROPOSED GRADE, LESS THE LENGTH FOR THE FIRE HYDRANT BURY. IF BREAK-OFF RISER EXCEEDS 18". USE NEXT 1 FT LONGER BURY.
 - 6. BLOW-OFF LOCATION: TEMPORARY BLOW-OFFS SHALL BE LOCATED SO THEY DO NOT INTERFERE WITH FUTFURE IMPROVEMENTS THAT WILL BE INSTALLED PRIOR TO THE WATER MAIN
- 7. WHEN NO CURBS OR SIDEWALKS ARE PROPOSED BLOW-OFF IS TO BE PLACED 18" WITHIN THE ROAD RIGHT-OF-WAY.



	REVISIONS						APPROVALS			
N	١٥.	DATE	INITIAL	DESCRIPTION	APP'D	DATE		INITIAL	DATE	
	<u>/s</u>	4/23/21	GS	UPDATED TITLE BLOCK, FONT AND LOGO	AGA	4/23/21	DESIGN			
4	4	2/23/11	GS	REVISED TRACT BOUNDARY NOTE	SMM	2/28/11	CONSTRUCTION			
2	3	10/28/03	СМ	REV. NOTES FOR AC PIPE &VALVE LOCATION	VJB	10/28/03	INSPECTION			emw
	2	4/17/00	GR	REV ALL FONT, NOTE 2 & ADDED NOTE 7	VJB	5/19/00	OPERATIONS	PR	5/18/93	
_	Λ	4/19/93		REDRAWN W/CADD ON MYLAR	VJB	5/19/93	SUBMITTED	VJB	5/19/93	
	REFERENCES:					ONE	RECOMMENDED Joseph D, Van Sickle DIRECTOR OF ENGINEERING			
L	FILE I.D.: \kauai\eng\std dwgs\B-568.dgn					BY: GS				

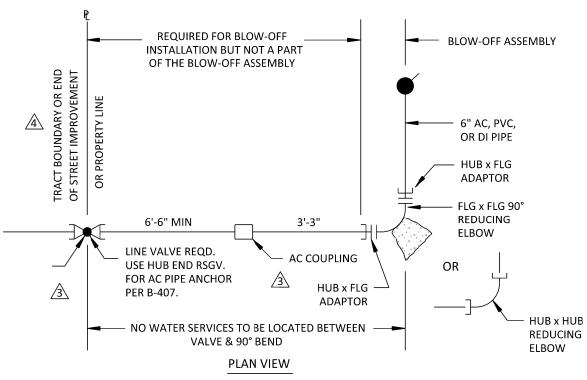

EASTERN MUNICIPAL WATER DISTRICT STANDARD DRAWING

6" X 1-2½" BLOW-OFF TEMPORARY END INSTALLATION - AC, PVC, DI PIPE

APPROVED.

G. Hooite Gugge

7/2/93

B-568

6/1/93 DATE