



January 2, 2019

ADDENDUM NO. 2 TO SPECIFICATION NO. 1347S
Winchester Lift Station Odor Control Facility

This addendum to the specifications is for the purpose of adding, clarifying, or deleting certain information to the construction drawings and project specifications as follows:

NOTICE INVITING BID

REVISE NIB-1 as follows:

NIB-1. Receipt of Bids. Sealed proposals (bids) for this project will be received and time-stamped by Eastern Municipal Water District no later than **10:00 a.m., THURSDAY, JANUARY 10, 2019** (from time stamp clock) at which time and place they will be publicly opened.

Hand deliver/Fed Ex your bid to: EMWD, 2270 Trumble Road, Perris, CA, 92570
Mail your bid to: EMWD, P.O. Box 8300, Perris, CA 92572-8300

Bids are received at the Operations and Maintenance Center lobby only. Please follow the VENDORS/BIDDERS signs to the Operations and Maintenance parking lot, enter the lobby, and have your bids time-stamped by the Receptionist.

All bids submitted will become the property of EMWD and subject to disclosure under the Public Records Act. All bids will be posted on the website www.emwd.org approximately 10 days from bid opening.

SPECIAL CONDITIONS

SC-50. Slide Gates.

REPLACE SC-50 in its entirety.

The Contractor shall include cost under Additive Bid Item No. A2 for the following:

1. Match, furnish, and replace in-kind TWO Fontaine Series 20 Stainless Steel 316 Sliding Gates, 204-36x36-K-WT and ONE Fontaine Series 20 Stainless Steel 316 Sliding Gates, 204-24x24-K-WT, including lifting stems, stem guides, pedestal operators with crank, and appurtenances.

2. Additive Bid Item No. A2 also requires work for a complete and operational system. The Contractor shall make the following assumptions to provide a complete cost for the following under Additive Bid Item No. A2:
 - a. Within 75-days of contract start, the Contractor shall implement a full wet well by-pass operation and complete the following:
 - i. Enter the wet well and remove debris and clean wet wells.
 - ii. The Contractor can rely on the District providing vector trucks and handling offsite disposal of debris.
 - iii. The Contractor shall be responsible for all entrances to the wet well and removal of debris from the wet well.
 - iv. The Contractor shall perform field investigation of actual wet well conditions.
 - v. The Contractor shall be responsible for meeting all safety requirements for entering the wet wells including the District's confined space entry requirements.
 - b. For replacement of gates, the Contractor shall assume that the existing retaining bolts cannot be used and must be replaced with new epoxy anchors.
 - c. The Contractor shall assume that the PVC T-Loc liner around the gate openings will need to be repaired, as well as, provide an allowance for additional repair identified during field investigation for up to 40 four inch PVC T-Loc liner patches.
 - d. The Contractor may perform the gate replacement during the full wet well by-pass planned for the lift station odor control work or may implement a separate full wet well by-pass. The costs for extending the originally planned wet well by-pass or implementing a separate full lift station by-pass shall be included within Additive Bid Item No. A2. The Contractor shall comply with SC-26 and provide the necessary duration of a full wet well by-pass to complete the work included within Additive Bid Item No. A2.

QUESTIONS & ANSWERS

Schuler Constructors Inc.

Q1. After receiving addenda 1 and the additional work of furnishing and installing new slide gates now required we need you to clarify who is responsible for cleaning out the wet wells and if the contractor where can we dump the debris from the cleaning.

A1. See modifications to SC-50 provided under this addendum.

Q2. With the addition of the slide gate replacement we need additional time to get pricing on the replacement due to the holidays it is only in the best interest of the district.

A2. Bid opening has been changed to January 10, 2019 at 10:00 am under this addendum.

Q3. On I2 they show ait3 and ae3 I believe this is a typo and should have said ait 1 and ae 1 can you please confirm there is only 1 analyzer for the project?

A3. The I-2 drawing shows AIT 1 and AE1 being future, while AIT 2&3 and AE 2&3 are part of this project.

Q4. Note 5 on I2 calls for the VFD'S to be located in the ocp-1 panel located on the slab but E6 shows the VFD'S located in the electrical room. I need this answered so we know who's going to furnish.

A4. VFDs are to be located within the existing electrical room.

Q5. Due to the holidays, is there any chance you can move the bid date to Thursday the 10th or later?

A5. Bid opening has been changed to January 10, 2019 at 10:00 am under this addendum.


Q6. Per SC-26 please provide a LF quantity on sound panels required for bidding purposes and include a bid item for this.

A6. SC-26 provides a performance standard that contractor must meet. The contractor has multiple means and methods available to satisfy this performance standard.

Q7. Are we to list the single source supplier for the odor control system approved per the spec in the bid package?

A7. The contractor shall supply equipment as specified. A listing of the supplier at the time of bid opening is not a requirement.

Eastern Municipal Water District

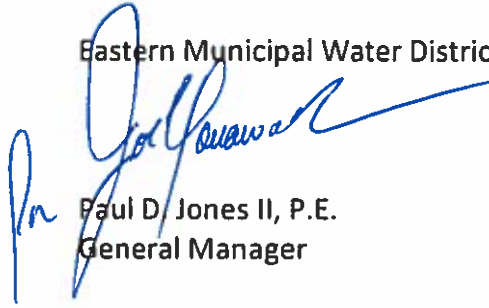

Paul D. Jones II, P.E.
General Manager

PE: TLJ/ve

PM: LTJ

DFE: BM

DE: LM

for

PDJ:WC:ELJ:vw:jrm