



**February 19, 2020**

**ADDENDUM NO. 1 TO SPECIFICATION NO. 1387W**  
**Las Brisas Transmission Pipeline**

This addendum to the specifications is for the purpose of adding, clarifying, or deleting certain information to the construction drawings and project specifications as follows:

**NON-MANDATORY PRE BID WALK THROUGH**

A non-mandatory pre-bid walk-through meeting was conducted on February 4, 2020 at 9:00 am.

NOTE: Refer to EMWDs website to obtain the Pre Bid Walk-Through Sign-In Sheet.

**QUESTIONS & ANSWERS**

**Northwest Pipe Company**

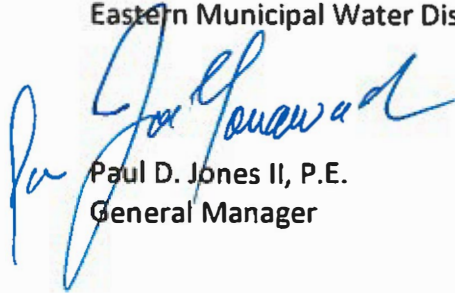
Q1. Reference Project Profile Drawings, the steel pipe is shown to have a 0.1875" "Minimum" wall thickness. Please confirm that manufacturing tolerances for wall thickness listed in AWWA C200 apply.

A1. The referenced AWWA C200 tolerances are acceptable for this project.





Q2. Reference EMWD Standard Drawing B-638. The "Double Pass Full Weld" Detail (Section "A"- "A") shows a gasket joint with a filler rod for field welding. Please confirm that areas designated to be welded will be allowed to use a standard expanded bell and spigot lap-weld joint without the gasket and filler rod.

A2. A standard expanded bell and spigot lap-welded joint without the gasket and filler rod will be acceptable for welded joints.

Eastern Municipal Water District



Paul D. Jones II, P.E.  
General Manager

PE:   
PM:   
DFE:   
DE: 

PDJ:CC:mf:ae