



May 13, 2020

**ADDENDUM NO. 2 TO SPECIFICATION NO. 1397W**  
**Vista Tank Interior Recoating**

This addendum to the specifications is for the purpose of adding, clarifying, or deleting certain information to the construction drawings and project specifications as follows:

**SPECIAL CONDITIONS**

*REVISE* SC-21 as follows:

**SC-21. Pipeline Connection and Disinfection.** The Contractor shall notify the District one (1) week in advance of the planned pipeline connections and also provide 48-hour and 24-hour advance confirmation of when the work will be performed. The Contractor shall be responsible for dewatering the trench excavations as necessary.

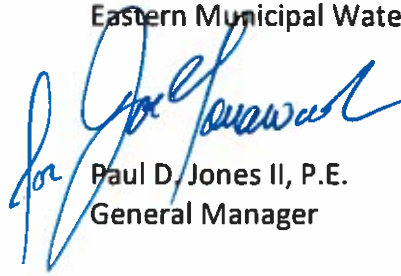
Contract shall consider the distinct possibility that the existing water system line valves will not achieve 100-percent closure, which may result in water leakage during tie-in procedures and abandonments. Therefore, the contractor may need to continuously dewater existing water pipeline during tie-in work.

Contractor shall be responsible for dewatering, dechlorination, and disposal of all water from pipeline testing/flushing activities. Discharge of all water must abide by the District's NPDES permit which limits total residual chlorine to a maximum concentration of 0.1 mg/l.

Contractor shall also protect existing water pipelines from contamination during connection procedures. Contractor shall disinfect all new pipelines, pipeline connection closure materials and the existing pipeline at connection points per AWWA Section C-651. All costs associated with connections to existing water pipelines shall be included in the appropriate bid item.

No additional compensation or time extensions will be allowed.

Eastern Municipal Water District

A handwritten signature in blue ink, appearing to read "Paul D. Jones II", is written over the printed name and title.

Paul D. Jones II, P.E.  
General Manager

PE: AMS  
PM: SMCI  
DFE: BOH  
DE: SR

PDJ:JA:jl